




http://www.adadepot.com

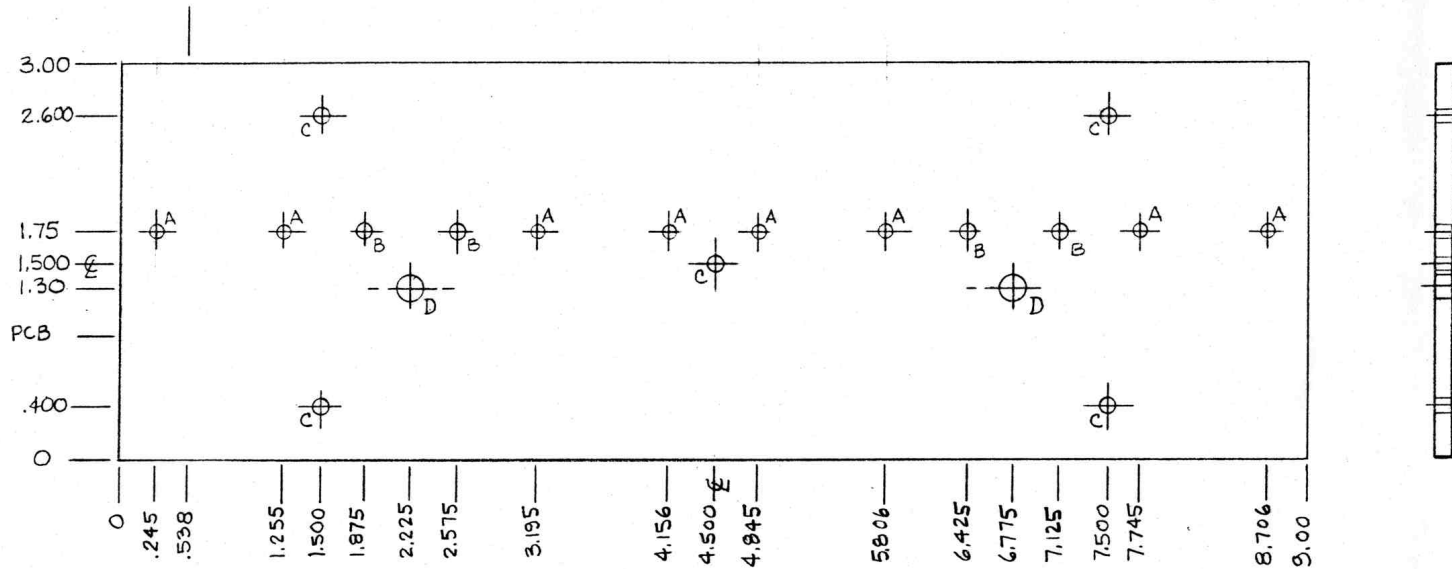

NOTES:

1. M^TL: 0.125" THICK ALUMINUM
2. TOL: XX = ± 0.01 XXX = ± .005 , DIA. = +0.003 - 0.001
3. ALL DIMENSIONS IN INCHES.
4. HOLE CHART:

DESIGNATOR	SIZE	THREAD SIZE	USE
A		4-40 M. SC.	4-40 x 5/16 M.S.
B		6-32 M. SC.	6-32 x 3/16 SELF TAPPING MS.
C		6-32 M. SC.	6-32 x 3/16 SELF TAPPING MS.
D	.1875-.203	NOT THREADED	TO-92 TRANSISTOR HOLE.

5. FINISH: DEBURR ALL HOLES

B	RE CALC. HOLE LOCATIONS & TAP SPECS.	DJT	11-1-88
C	MOVE D HOLES, NO FINISH	DJT	11-11-88

CHASSIS, HEATSINK B200S (540601)			
SCALE: 1:1	APPROVED BY: DJT	DRAWN BY DJT	
DATE: 10-27-88		REVISED 11-10-88	
ADA SIGNAL PROCESSORS, INC. 7303 D EDGEWATER DR., OAKLAND, CA 94621			
			DRAWING NUMBER REV B518 C